


FWA-6170 DIMM Population Rules


FWA-6170 supports up to 24 DIMMs with 2666 MHz memory ECC RDIMM. There are 12 memory channels and each channel has 2 dimm slots (one black & one blue).

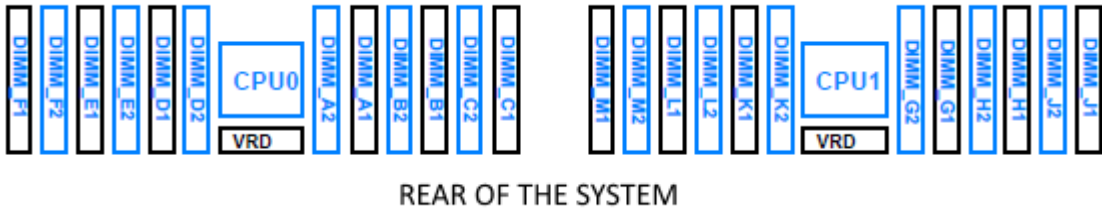

Examples:

1. If you have 24 memories then you should use all the slots i.e. 12 black slots and 12 blue slots.
2. If you have 12 memories, all 12 would be distributed over all 12 black slots.
3. For 8 memories please use the following slots:

DIMM_A1	DIMM_J1
DIMM_B1	DIMM_K1
DIMM_C1	DIMM_G1
DIMM_D1	DIMM_H1

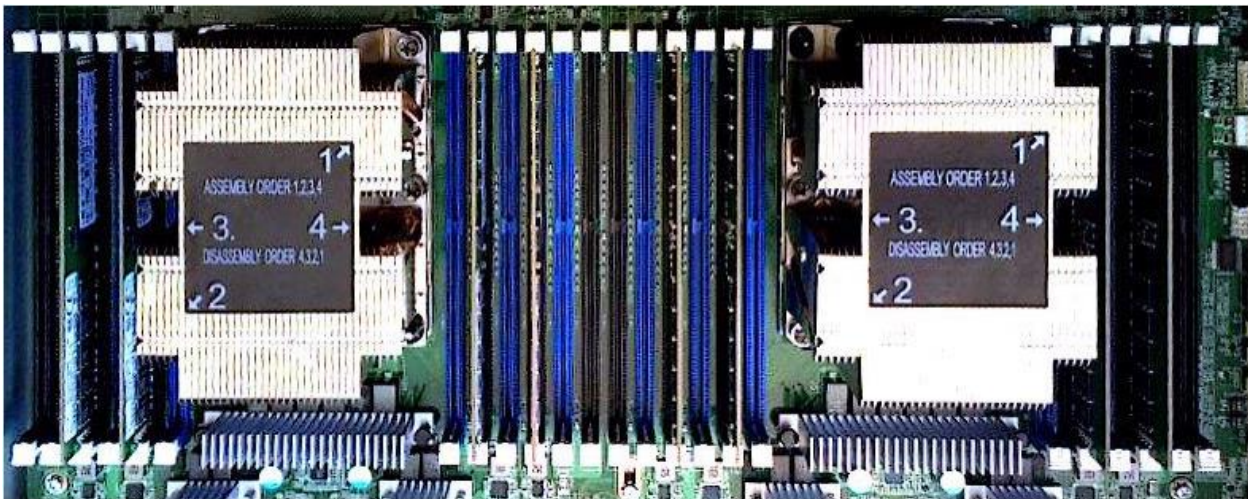

4. Installing 1 memory per CPU, please use the following slots.

DIMM_A1
DIMM_G1